

## LOW LEVEL INFEED PALLETIZERS

Available with Integrated  
Stretch Wrapping

### Revolutionize Your Material Handling

TopTier's **low-level palletizer** delivers maximum efficiency and unmatched flexibility for businesses that demand performance and adaptability.

### Smallest Footprint in the Industry

With integrated **concurrent stretch wrapping** and a compact modular design, our low infeed palletizer optimizes floor space while maintaining high throughput.



### Smart Modular Engineering

- Shared Modules: Common functional modules and frame systems reduce costs through manufacturing and controls efficiencies.
- Layout Flexibility: Modules adapt to meet your facility's needs.
- Quality Control: Consistent, precise manufacturing ensures long-term reliability.

### Easy to Install & Operate


While engineered with complex, high-performance designs, each system is straightforward to install, operate, and maintain.

### No Customization Needed

The orientation of induction and load exit can be configured to match your exact requirements — without additional customization.



TopTier's **modular component systems** deliver unmatched flexibility in palletizer configuration and product handling.

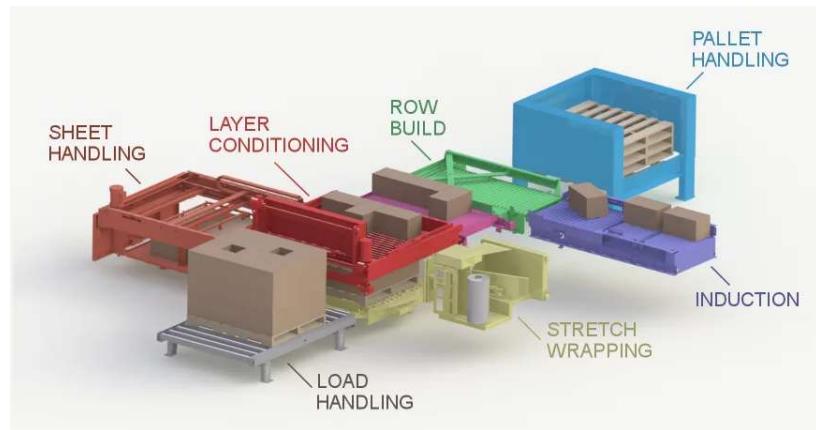

TopTier palletizers feature **Easy Stack Pro**, the most advanced and easiest to use operator interface on the market. Easy Stack Pro is so intuitive, **new operators begin operating our palletizers in under 15 minutes.**



## Capabilities

Rates: 1-3 layers per minute

Infeed: Low

Products: Case, tray, trayless, open top, lidded, overwrapped or unwrapped, bundles, nested, display packs

Infeed Height: 23" to 60"

Minimum Case Dimension: 4.5"

Maximum Case Dimension: 29"

Maximum Case Height: 36"

Minimum Layer Dimension: 38"

Maximum Layer Dimension: 50"

Standard Layer Weight: 300 lbs.

Standard Load Height: 60" or 72"

Minimum Footprint: 162" x 115"

Typical Footprint: 233" x 155"

## Options

All-electric

Concurrent Stretch Wrapping

Freezer

Labels-out

Load Handling

Load Labeling

Pallet Handling

Perfect Pattern Induction

Sheets & Liners

Double Stack Loads

Layer Weight to 1000 lbs.

Tall Loads to 110"